


SwapBox* Classic Combo

- Front combination floppy drive and PCMCIA adapter
- Type I, II & III PC Cards supported
- Hot swap capability
- Standard PC AT*-compatible 16-bit ISA bus interface
- PCMCIA Socket and Card Services software
- SwapFTL* software drivers (floppy/hard disk emulation)
- Hardware supported under OS/2/Warp*, Windows* NT and Windows 95
- Fully compatible to PC Card specifications

This multi-functional PC Card adapter provides concurrent access to both PCMCIA cards and floppy disks from a single 3.5 inch drive bay. Platforms with no additional drive bays will find this solution ideal. The PCMCIA drives allow you to access Type I, II and III PC Cards. Card detection, SRAM battery level lights and an on-board speaker for PC-Card modem support are included.

The SBI-FD1 utilizes a half-size 16-bit AT/ISA bus controller board. The PCMCIA Socket and Card Services software provides automatic configuration, operation and Hot Swap. Hot swap is the capability to insert cards without having to reboot the machine or manually reconfigure the cards. The SwapFTL Flash Filing system driver enables full floppy disk or hard disk emulation on flash cards. It is compatible with all compression and PC-utility software. Incorporated is a single drive letter designator for all memory cards. The SwapBox* family of adapters works flawlessly with Intel's Flash memory cards.

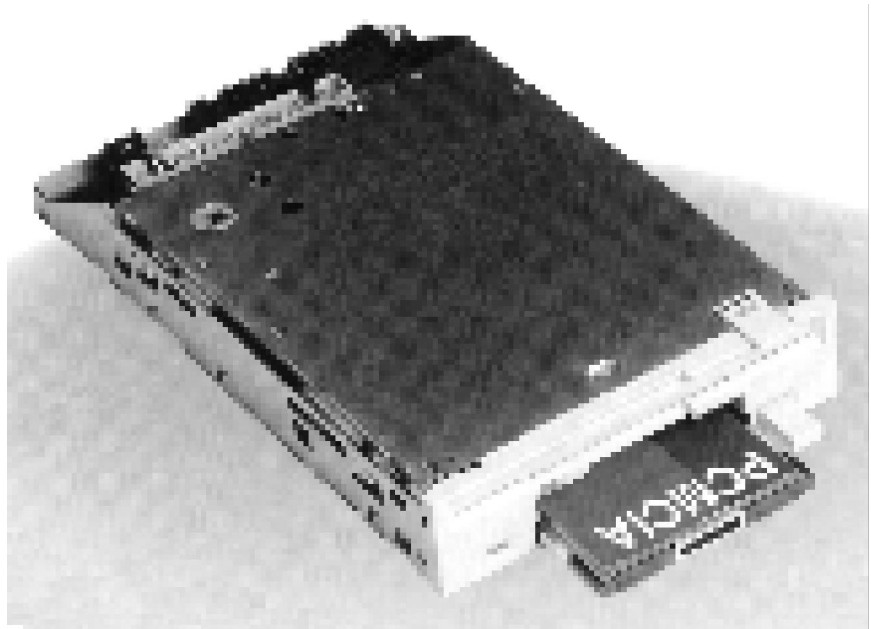

Maximum data transfer rates with an MS-DOS* 3.3 operating system, including all system related delays:

For read mode:

SRAM/Flash up to 1Mbyte
HDD up to 200 Kbytes

For write mode:

SRAM up to 1 Mbyte
flash up to 150 Kbytes
HDD up to 200 Kbytes

INTEL FLASH MEMORY
SUPPORTED:

Series 2 Cards, Series 2+ Cards, Value
Series 100 Cards, Series 100 Miniature
Cards

AVAILABILITY:

Now

CONTACT:

SCM Microsystems, Inc.

131 Albright Way

Los Gatos, CA 95030

Phone: (408) 370-4888

FAX: (408) 370-4880

Email: pccard@scmmicro.com

WWW: <http://www.scmmicro.com>

BBS: (408) 370-4881

SCM
MICROSYSTEMS