



EMULATION TECHNOLOGY, INC.


Specification Number: M1308

PROGRAMMING ADAPTER SPECIFICATION

Item: 404002TS600YAMS
Description: AS-40-40-02TS-6YAM-GANG-S (Rev. B)

REPLACEMENT SOCKET: S-TSO-00-040-A
Call Emulation Technology for a replacement socket price and delivery quote.

TYPICAL DIMENSIONS:

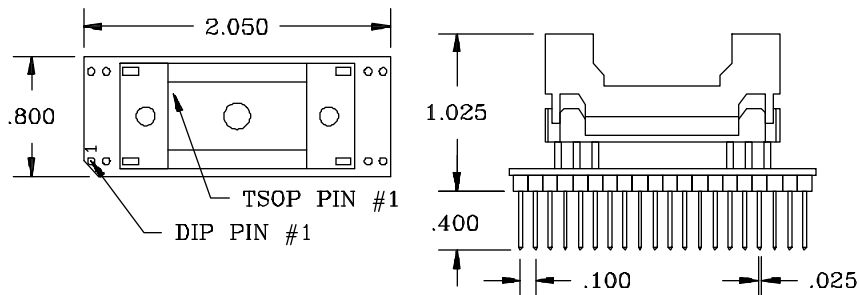


All Dimensions in Inches.

(Assembly Drawing: F1308)

CONNECTION TABLE:

40-Lead TSOP SOCKET	PIN Names	40-Pin DIP Base
1	A16	38
2	A15	37
3	A14	36
4	A13	35
5	A12	34
6	A11	33
7	A9	31
8	A8	29
9	WE#	39
10	RP#	5
11	V _{PP}	1
12	WP#/DU	V _{CC} Plane
13	NC/A18	9
14	A7	28
15	A6	27
16	A5	26
17	A4	25
18	A3	24
19	A2	23
20	A1	22
21	A0	21
22	CE#	2
23	GND	11 & 30
24	OE#	20
25	DQ0	19
26	DQ1	18
27	DQ2	17
28	DQ3	16
29	NC	NO TRACE
30	V _{CC}	40
31	V _{CC}	40
32	DQ4	15
33	DQ5	14
34	DQ6	13
35	DQ7	12
36	A10	32
37	NC/A19	8
38	NC	NO TRACE
39	GND	11 & 30
40	A17	10
NO TRACE	NC	3
NO TRACE	NC	4
NO TRACE	NC	6
NO TRACE	NC	7

PACKAGE SPECIFICATIONS:

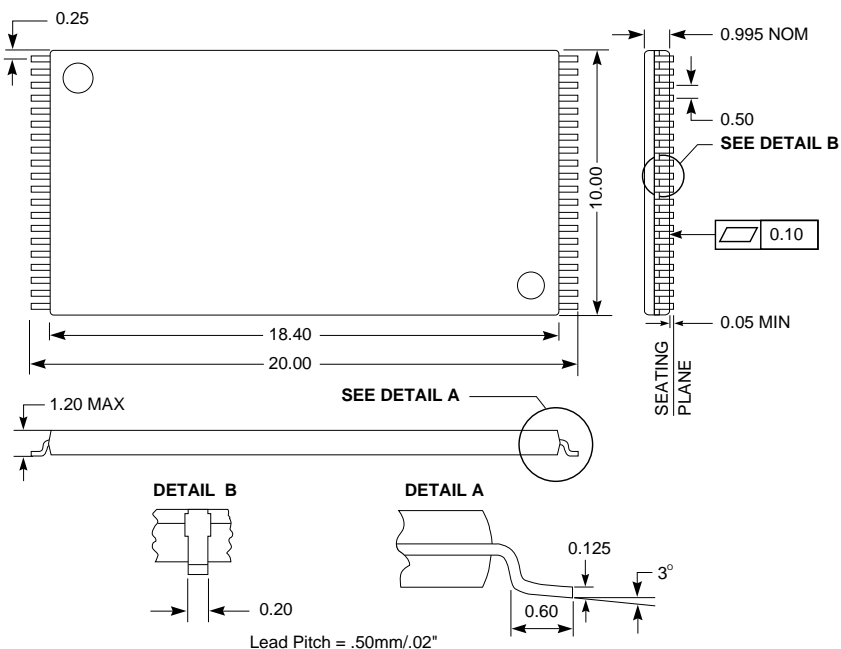

All Dimensions in Millimeters.

ET Code: 040-TS01

Compatible TSOP devices:

E28F002BE E28F004BE E28F008BE
E28F002BL E28F004BL E28F008BV
E28F002BX E28F004BV
E28F002BV E28F004BX

Manufacturers:

Intel

Programmiers:

Advin Systems: Pilot-U84/40, Pilot-145/4
Aval Data: PKW-5100
B&C Microsystems: Proteus
BP Microsystems: BP-1200(SM48D), EP-1140
Bytek: EZ-FT
Data I/O: ChipLab-48, UniSite(SetSite)
Emulation Technology, Inc.: ET-PIC 4000/48

Elan: 6000, 4000/5000 TURBO, 3000/4000/5000
Logical Devices: AllPro-88XR/88/40, Chipmaster 3000, and GangPro-SII
SMS: Sprint PLUS48/Optima/Expert/MultiSyte
Stag: Quasar-1040/1084
System General: Multi-APRO, APRO, TURPRO-1/-1FX, and TURPRO-840



EMULATION TECHNOLOGY, INC.

2344 WALSH AVENUE • BUILDING F
SANTA CLARA, CA 95051-1301
TEL 408 / 982.0660 • FAX 408 / 982.0664

Call today for a FREE Full Line Catalog and Unlimited Application Consulting!

Page 1 of 1
Date: 10/24/96
Rev: J

The Emulation Technology logo is a registered trademark of Emulation Technology, Inc.